# Service Manual

**Network Camera**

## BL-C30CE / BL-C30E
### (for Europe)

Please file and use this supplement manual together with the service manual for Model No. BL-C30CEBL-C30E Order No. KMS0504058CE.

# 1. CHANGES

## 1.1. MAC Address LABEL

When PCB1 changes, you will take MAC Address LABEL in a plastic bag of PCB1 and attach it on the place where the previous MAC Address LABEL were attached in a CABINET COVER, #13.
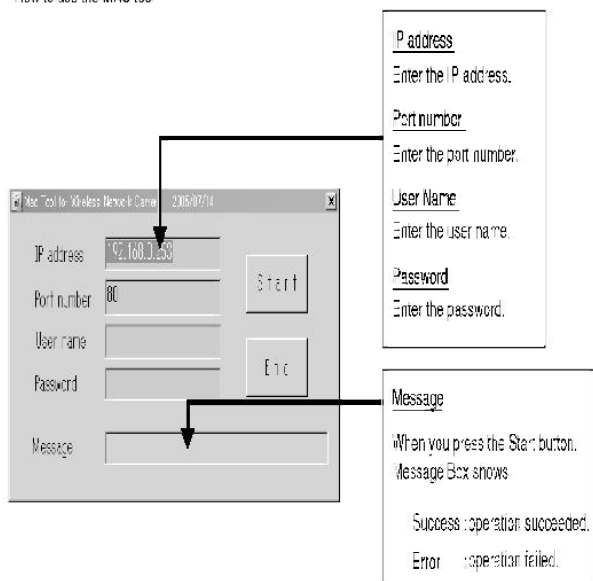The previous PCB1 shall not be used after changing to the new one.

## 1.2. TROUBLE SHOOTING

Addition from the Original Service Manual page54.

How to use the MAC tool

**Make sure to employ the following MAC tool for replacing the wireless board or the main board.**

How to use the MAC tool

IP address
Enter the IP address.

Port number
Enter the port number.

User Name
Enter the user name.

Password
Enter the password.

IP address: 192.168.0.253

Port number: 80

User name:

Password:

Start

End

Message

Message
When you press the Start button,
Message Box shows

Success : operation succeeded.
Error : operation failed.

1. Set up wireless communication for the network camera
2. Run the MACtool.exe file.
3. Enter the IP address, the port number, the user name and the password. Press the start button.
4. If the word 'Success' is displayed in the Message Box, the operation has been successful.
5. Exit the MAC tool.
Go back to the check after repair to verify the status again..

*If the wireless board or the main board is replaced, make sure to execute the MACtool.exe file.

# T.H. / BL-C30CE / BL-C30E